



FASSON® 0808

2 mil Foil


Specially designed for taping joints and seams against moisture and vapor foil jacketing facing and FSK blankets.

FEATURES:

- Specially formulated antimicrobial, extreme weather, COLD TOUGH™ acrylic adhesive
- Dead soft aluminum foil
- Excellent adhesion and quick stick
- Application temperature as low as 0° F
- PSA complies with South Coast Air Quality Management District's (SCAQMD) Rule 1168.

BENEFITS:

- Conformability to curved surfaces
- Strong bond to a variety of substrates
- Meets Parts 2 and 5 of Annex 1 of the IMO FTP Code
- All Weather Acrylic Insulation Sealant Tape
- Approved for use by the US Coast Guard in accordance with International Maritime Org. (IMO) A.653(16) and ISO 65659.
- Made in the USA

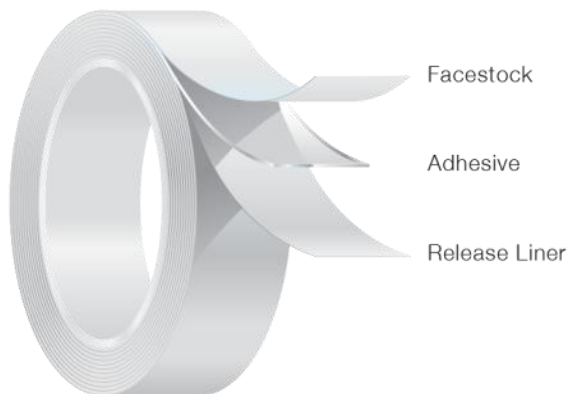

CONSTRUCTION:

Carrier:

Aluminum Foil

Adhesive:

COLD TOUGH™ Acrylic

Liner:

Densified Kraft



General Use Tape Surface Burning Characteristics to

UL 723	Flame Spread	Smoke Developed
	5	5
	722S	

LEED® Point Contributor

* Contributes to Energy Atmosphere (SA) Credit 1

* Contributes to Indoor Environmental Quality (IEC) Credit 4.1

FASSON® 0808

Adhesive Properties:		Typical Values	
Thickness	Test Method(s): PSTC-133	US Mils	MM's
Liner:		3.2	0.08
Adhesive:		1.7	0.04
Carrier:		2.0	0.05
Total Caliper:		6.9	0.18

PEEL ADHESION		Test Method(s): PSTC-101, ASTM D-3330, STD-10		
Product 180° 12" min				
Substrate	Initial	Lbf / In	US Oz / In	N / Meter
SS		4.0	64	700

LOOP TACK		Test Method(s): PSTC-16, STD-7		
Product 180° 20" / min				
Substrate	Initial	Lbf / In	US Oz / In	N / Meter
SS		6.0	96	1051

TLMI RELEASE		Test Method(s): PSTC-4, STD-8		
Product 90°				
Substrate	Initial	Gf / 2 In w		
SS	300" / min	30.0		

STATIC SHEAR		Test Method(s): PSTC-107, ASTM D 3654, STD-9		
Product 1" sq (6.5 cm2) 2500 g				
Substrate	Initial	Min to Fail		
SS		> 1,000		

VOC Content				
Product				
Substrate	Initial	%		
Product		< 15		

TEMPERATURES	° F	° C
Min Application Temp	0 ° F	-17 ° C
Max Continuous Operating Temp	200 ° F	93 ° C
Max Intermittent Operating Temp	250 ° F	121 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2013 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery™ and all other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

South America
Rua Francisco Foga, 225
13280-000 Vinhedo
SP Brazil
Phone: +55 19 3876 7736
Fax: +55 19 3876 7682

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469