





EJ™ 1650 Insulation Jacketing Material

PTFE/FIBERGLASS COMPOSITES ENGINEERED FOR REMOVABLE INSULATION SERVICE

EJ™ 1650 Gray Description:

This PTFE/fiberglass composite is designed for challenging insulation jacketing applications.

- **Successfully used in insulation jacketing service since 1985.**
- **Special coating technology for industrial fabrication**
- **Severe chemical and temperature exposure capabilities**

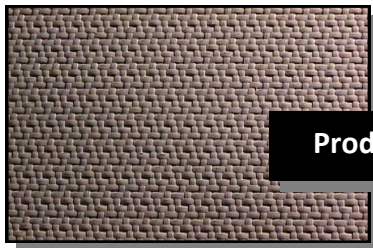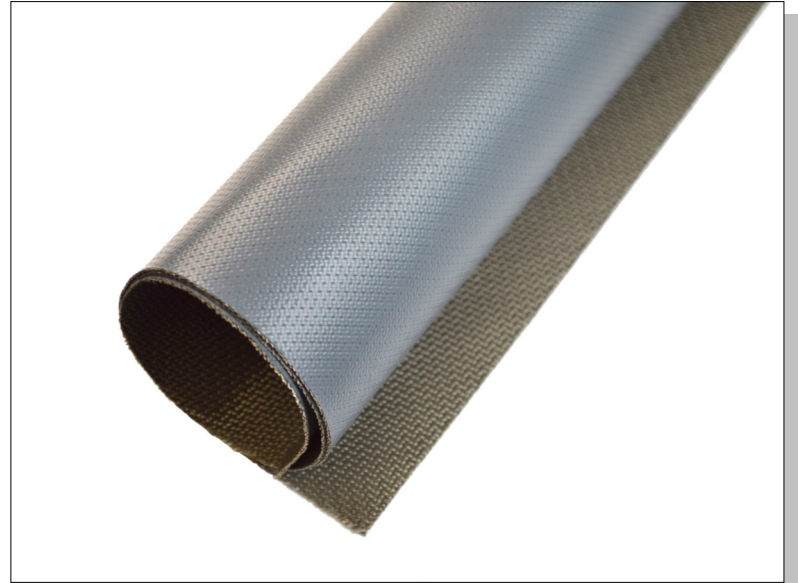

Product Close-up

- **Variations available upon request**
- **Easily sewn**
- **Flame-resistant**

EJ™ 1650 PROPERTIES

Upper Use Temperature:	600°F (316°C) Continuous Service
Overall Weight:	16.5 oz/yd ² (560 g/m ²)
Thickness:	0.015 inches (0.38 mm)
Width:	60 inches (1524 mm) Nominal
Tensile Strength (Warp):	400 lbs/inch (3503 N/50 mm)
Tensile Strength (Fill):	300 lbs/inch (2627 N/50 mm)

EJ™ is a trademark of TCI (Textiles Coated International). This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.